

Statistics					
	Average	Maximum	Minimum	Max/Min	Avg/Min
SOCCER	33	40.9	22.3	1.8	1.5



One Lithonia Way Conyers, GA 30012


These lighting calculations are not a substitute for an independent engineering analysis of lighting system suitability and safety.

Luminaire Schedule

Symbol	Qty	Catalog No.	Lamp	Initial Lumens
N	28	ASPX5M GN	MH1500/BU-HOR	151900
M	8	ASPX5M GM	MH1500/BU-HOR	151900

A2 (-75, 150)

A1 (75, 150)

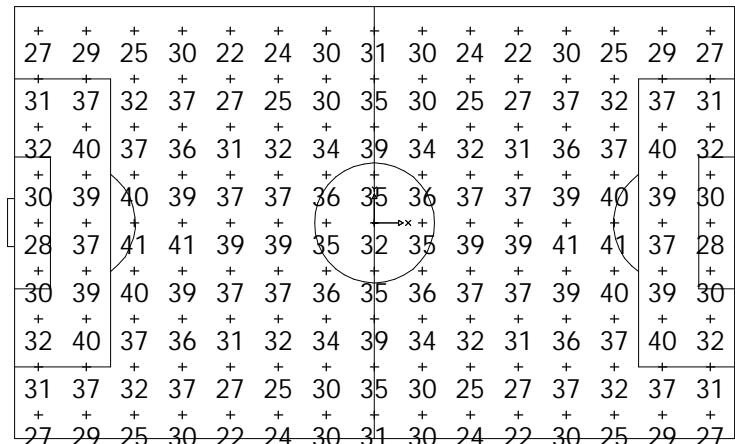

A4 (-75,-150)

A3 (75,-150)

Notes

- 1) Levels shown are maintained horizontal illuminance.
- 2) Based on a light loss factor of .80
- 3) Results are shown in units of footcandles.
- 4) Levels shown are taken 3 Feet above grade.
- 5) Includes effects of lamp operating position.
- 6) EPA does not include bracketry
- 7) Levels based on rated input voltage supplied to ballast

Luminaire Legend

Pole	Quantity	EPA[FT SQ]	Power[KVA]	Height
A1	9	29.7	14.49	70
A2	9	29.7	14.49	70
A3	9	29.7	14.49	70
A4	9	29.7	14.49	70

Drawing Number:

SCB432AS

Sheet 1 of 1

Drawn By:

Approved:

Date: 10/13/03

Scale: 1 Inch = 80 Feet

TYPICAL 180 X 300 SOCCER FIELD
4 POLE 30FC LAYOUT