

| Statistics | | | | | |
|------------|---------|---------|---------|---------|---------|
| | Average | Maximum | Minimum | Max/Min | Avg/Min |
| SOCER | 51.7 | 64 | 43.5 | 1.5 | 1.2 |




One Lithonia Way Conyers, GA 30012

These lighting calculations are not a substitute for an independent engineering analysis of lighting system suitability and safety.

Luminaire Schedule

| Symbol | Qty | Catalog No. | Lamp | Initial Lumens |
|--------|-----|-------------|---------------|----------------|
| N | 56 | ASPX5M GN | MH1500/BU-HOR | 151900 |
| M | 12 | ASPX5M GM | MH1500/BU-HOR | 151900 |
| W | 8 | ASPX5M GW | MH1500/BU-HOR | 151900 |

A2 (-180, 142) B1 (0, 142) A1 (180, 142)

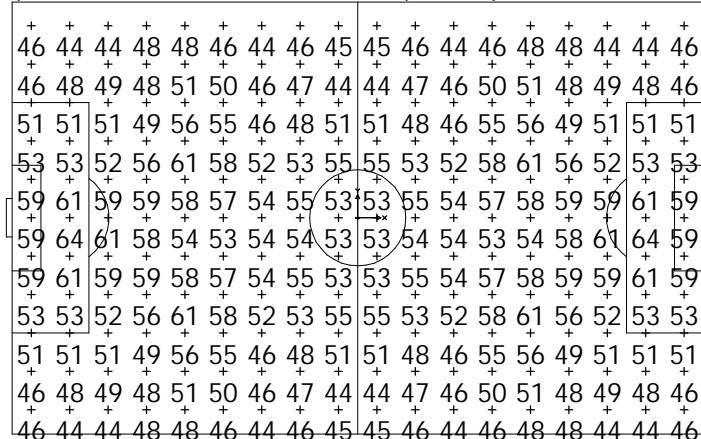

A4 (-180, -143) B2 (0, -143) A3 (180, -143)

Notes

- 1) Levels shown are maintained horizontal illuminance.
- 2) Based on a light loss factor of .80
- 3) Results are shown in units of footcandles.
- 4) Levels shown are taken 3 Feet above grade.
- 5) Includes effects of lamp operating position.
- 6) EPA does not include bracketry
- 7) Levels based on rated input voltage supplied to ballast

Luminaire Legend

| Pole | Quantity | EPA[FT SQ] | Power[KVA] | Height |
|------|----------|------------|------------|--------|
| A1 | 12 | 39.6 | 19.32 | 70 |
| A2 | 12 | 39.6 | 19.32 | 70 |
| A3 | 12 | 39.6 | 19.32 | 70 |
| A4 | 12 | 39.6 | 19.32 | 70 |
| B1 | 14 | 46.2 | 22.54 | 70 |
| B2 | 14 | 46.2 | 22.54 | 70 |

Drawing Number:

SCC653AS

Sheet 1 of 1

Drawn By:

Approved:

Date: 10/13/03

Scale: 1 Inch = 100 Feet

TYPICAL 225 X 360 SOCCER FIELD
6 POLE 50FC LAYOUT