


These lighting calculations are not a substitute for an independent engineering analysis of lighting system suitability and safety.

Statistics

	Average	Maximum	Minimum	Max/Min	Avg/Min
INFIELD	31.3	36.5	22	1.7	1.4
OUTFIELD	20.4	31.6	12.5	2.5	1.6

Luminaire Schedule

Symbol	Qty	Catalog No.	Lamp	Initial Lumens
N	12	ASPX5M GN	MH1500/BU-HOR	151900
M	4	ASPX5M GM	MH1500/BU-HOR	151900
W	12	ASPX5M GW	MH1500/BU-HOR	151900

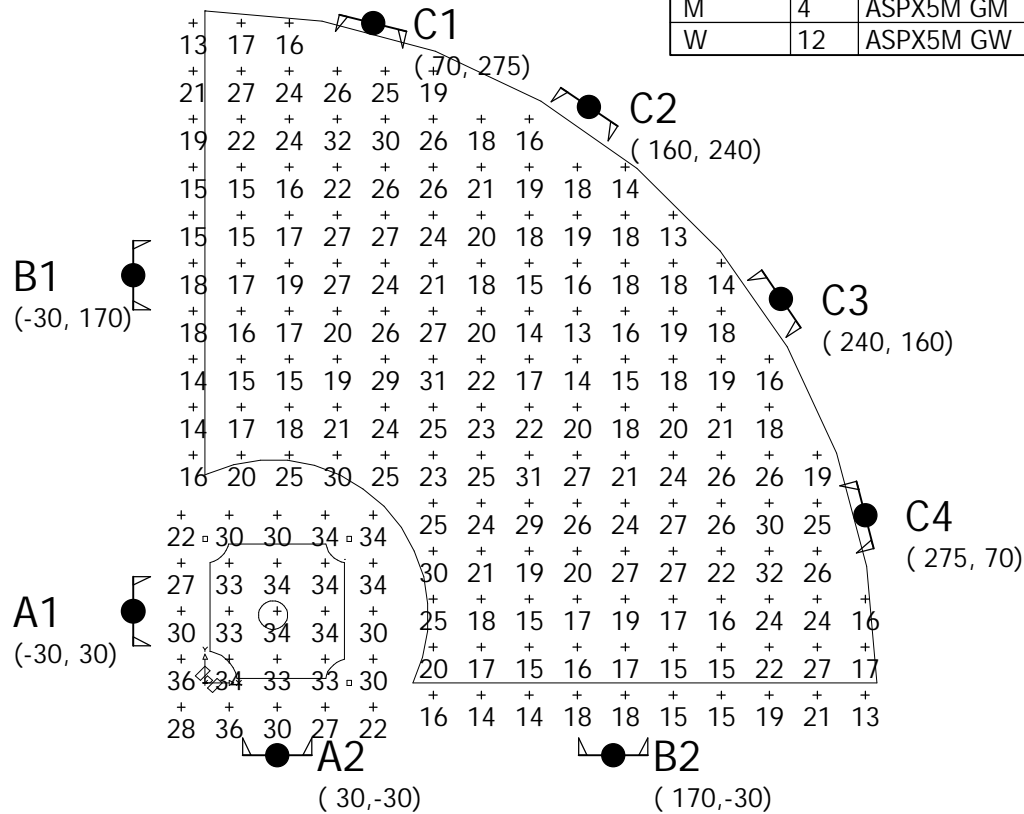

Notes

- 1) Levels shown are maintained horizontal illuminance.
- 2) Based on a light loss factor of .80
- 3) Results are shown in units of footcandles.
- 4) Levels shown are taken 3 Feet above grade.
- 5) Includes effects of lamp operating position.
- 6) EPA does not include bracketry
- 7) Levels based on rated input voltage supplied to ballast

Luminaire Legend

Pole	Quantity	EPA[FT SQ]	Power[KVA]	Height
A1	3	9.9	4.83	60
A2	3	9.9	4.83	60
B1	6	19.8	9.66	70
B2	6	19.8	9.66	70
C1	2	6.6	3.22	70
C2	3	9.9	4.83	70
C3	3	9.9	4.83	70
C4	2	6.6	3.22	70

Drawing Number:	SB836AS	Drawn By:	
		Approved:	
Sheet 1 of 1		Date: 10/13/03	
		Scale: 1 Inch = 80 Feet	

TYPICAL 280FT SOFTBALL FIELD
8 POLE 30/20FC LAYOUT